





Floorwise supplies the flooring professional with a quality and versatile range of wood, laminate flooring & LVT installation accessories that won't let you down on the job!



### sub floor preparation

Floorwise supply the flooring professional with a versatile range of quality levelling compounds which are the level best!

F5GOLD Pro-Screed Gold 2 Part rapid setting latex polymer levelling & smoothing compound

#### **F5GOLDLL** Pro Screed Latex Liquid

A versatile 2 part latex polymer levelling and smoothing compound with excellent flow and adhesion properties.

- Rapid Setting
   Walk on after 90 minutes
   Install floorcoverings after 4 hours
- Excellent flow and application properties
- Low odour

- Suitable for use over old adhesive residues
- Moisture tolerant
   can be used below and above
   surface membranes
- No priming necessary on most subfloors
- Perfect for timber substrates
- Suitable for use
   with underfloor heating systems
- Protein, ammonia & casein free

Walk on time: **90 minutes**Working time: **Approximately 20 minutes** 

Apply floorcovering: **Typically 4 hours** (3 hours for ceramic tiles)

Compressive strength: C16 after 28 days

Application thickness: Featheredge to 10mm unfilled from 10mm to 30mm filled

(3mm granite chippings)

Coverage: 5–6m² @ 3mm per 20kg bag + 5L liquid





made in the **UK** 

5

**20**kg



## b floor preparation

## F5FEA Pro Screed Feather Edge ultra fine, rapid setting levelling & patch repair compound

An ultra-fine rapid setting, fast drying, high polymer levelling and patch repair compound. The unique formulation truly delivers a feather edge from 0-3mm, perfect for feathering and patching depressions, trowel marks, ridges, gouges and joints in subfloors, as well as smoothing over screw heads

and joints between sheets of plywood. With outstanding adhesion properties the compound can be used without a primer and can be applied over most underfloor heating systems.

- Rapid drying
- Install floorcoverings after 15 minutes
- Excellent adhesion properties
- Perfect for timber substrates
- No priming necessary
- Suitable for use with underfloor heating systems
- Protein free

Walk on time: 15 minutes

Working time: Approximately 10-15 minutes

Apply floorcovering: After 15 minutes

Application thickness: 0 to 3mm

Coverage: 45m<sup>2</sup> @ 1mm per

10kg bag mixed with 5L water







#### SP101 Plywood

The industry standard of flooring grade plywood that is fully compliant with the BS8203:2017 standards for installation of resilient floor coverings.

Guaranteed fit for purpose with the following attributes:

- BS 8203:2017 and CFA Guidance Compliant
- TFT Woodexperts
   Diamond Mark Certified
- Strict thickness and dimensional tolerances
- Controlled moisture content
- Thicker hardwood outer veneers
- High quality core
- Reliable gluing



Adhesives +Screeds

of floorwise

Wise up on the Floorwise Adhesives +Screeds range...ask for our brochure

at your nearest distributor!

3





## Sound reducing rubber underlays

#### Made from high density rubber composite the acoustica range of underlays are excellent impact and airborne sound reducers.

With the ability to absorb minor floor imperfections these underlays also provide the right level of cushioned support helping to increase underfoot comfort. Most have a built in moisture barrier which will protect the floor above and they are suitable for installation over most underfloor heating systems.

#### common features:

- Excellent sound reducers
- Premium cushioned support
- Absorbs minor floor imperfections
- Built in moisture barrier
- Increased underfoot comfort
- Suitable for underfloor heating



## oustica underlays





wiseup to floorwise quality&value guaranteed



### fibreboard underlay



## whisper sound reducing underlays

## Made from PE foam, the whisper range of underlays are good sound reducers.

With the ability to absorb minor floor imperfections, these underlays also provide a level of cushioned support and underfoot comfort. Most have a built in moisture barrier which will protect the floor above and they are suitable for installation over most underfloor heating systems.

#### common features:

- Good sound reducers
- Excellent cushioned support
- Absorbs minor floor imperfections
- Built in moisture barrier
- Increased underfoot comfort
- Suitable for underfloor heating





# erunderlays



Good Sound Reduction

These PE Foam underlays are good sound reducers and come complete with a built in water vapour barrier.















Roll Size: 1m x 15m



HIGH DENSITY **30 kg/m³**  **0.87**TOG rating

Roll Size:

1m x 15m

**15**m<sup>2</sup>

## whisper green barrier )





















HIGH DENSITY **30**kg/m<sup>3</sup>



### **Basic**

Sound Reduction

These PE Foam underlays are basic sound reducers.



## whisper 3mm)



















Roll Size: 1m x 15m





## whisper 2mm ))















Roll Size: 1m x 15m









Wise up on the Floorwise **carpet underlays** range.. .ask for our brochure at your nearest distributor!





#### Providing that finishing touch for all types of floorcoverings.

A choice of many profiles and finishes in the **Zenith range** makes it easy to find the ideal match to Wood, Laminate & LVT flooring. The range is available in a variety of sizes and heights, which delivers a neat, attractive and robust finish.

The Stick Down range is a must for the professional fitter, cutting down installation time by up to 80% against slower drill and fix methods. Simply cut to size, peel back the tape to reveal the extra strong adhesive and then just **Stick & Go** 


## 251 2 in 1 Stick Down Ramp Edge / Cover Strip 0-6mm

Cat. No: 251BSNA Brushed Steel Nickel

251CA Chrome 251OAA Oak

**251DKWA** Dark Walnut **251GOA** Grey Oak

This 2-in-1 Stick Down Ramp Edge & Cover Strip is used to conceal and protect joins for wood, laminate and resilient floorcoverings with a height variation between 0 and 6mm.

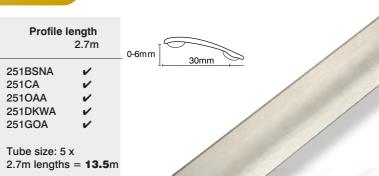


## **253 2 in 1 Stick Down Ramp Edge / Cover Strip** 0-12mm


Cat. No: 253BSNA Brushed Steel Nickel

253CA Chrome 253OAA Oak

**253DKWA** Dark Walnut **253GOA** Grey Oak

This 2-in-1 Stick Down Ramp Edge & Cover Strip is used to conceal and protect joins for wood, laminate, LVT and resilient floorcoverings with a height variation between 0 and 12mm.

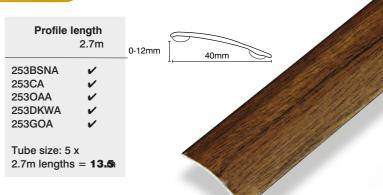

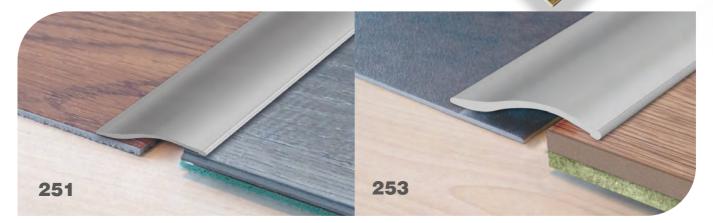

## zarifiti profles

#### 245 Z Edge Adjustable height up to 9mm

MG MS


Cat. No: **245MG** Matt Gold **245MS** Matt Silver

This versatile section is used to join carpets with a variety of floor coverings. The top can be adjusted to accommodate surfaces of different heights up to 9mm.

#### Profile length 2.7m

245MG 245MS

Tube size:  $15 \times 2.7 \text{m}$  lengths = **40.5**m



#### **277 Square Edge** 8mm

Cat. No: **277MG** Matt Gold **277MS** Matt Silver

Ideal as a capping edge, a finish to open plan areas, or edging to access panels and ceramic floors. To accommodate flooring up to 8.5mm thickness.

#### Profile length 2.7m

277MG **2**77MS **2** 

Tube size: 10 x2.7m lengths = **27**m





#### 287 Stick Down Edge 9mm

Cat. No: 287MGA Matt Gold 287MSA Matt Silver 287OAA Oak 287DKWA Dark Walnut 287GOA Grey Oak

A versatile section which can be used as a capping edge around the room. Also useful around fireplaces and as a finish to open plan areas or as an edge to matwells and access panels.














#### Profile length 2.7m

Tube Size: 10 x 2.7m lengths = **27**m





#### **288 Stick Down Edge 15mm**

Cat. No: **288MGA** Matt Gold **288MSA** Matt Silver

A versatile section which can be used as a capping edge around the room. Also useful around fireplaces and as a finish to open plan areas or as an edge to matwells and Access panels. Suitable for use with wood and thicker laminate floors with underlay.

#### Profile length 2.7m 288MGA 288MSA

Tube Size: 10 x2.7m lengths = **27**m



#### **289 Stick Down Sloping Edge 8mm**

Cat. No: **289MGA** Matt Gold **289MSA** Matt Silver

The Sloping Edge is a transitional profile and protects the edges of floor coverings up to a height of 8mm. With a diminishing sloping edge, the profile provides a ramp down to the adjacent floor covering.

#### Profile length 2.7m

289MGA 289MSA


A /

Tube Size: 10 x2.7m lengths = **27**m

### MGA







#### **290 Stick Down Sloping Edge 14mm**

Cat. No: **290MGA** Matt Gold **290MSA** Matt Silver

As **289**, but for use with 14mm wood or laminate on underlay.

## Profile length

2.7m


290MGA 290MSA

Tube Size: 10 x 2.7m lengths = **27**m











# Zerrith profles

#### 291 Stick Down Cover Strip 38mm











Cat. No: 291MGA Matt Gold 291MSA Matt Silver **2910AA** Oak

> 291DKWA Dark Walnut 291GOA Grey Oak

The versatile cover strip can be used to conceal and protect joins and expansion gaps between all types of wood, laminate and resilient floor coverings.

#### Profile length 2.7m

291MGA 291MSA 2910AA 291DKWA 291GOA

Tube Size: 10 x 2.7m lengths = 27m





#### 292 Stick Down Sloping Edge 22mm

Cat. No: 292MSA Matt Silver

The Sloping Edge is a transitional profile for use with wood flooring or on engineered wood with underlay. With a diminishing sloping edge, the profile provides a ramp down to the adjacent floor covering.

#### Profile length 2.7m

292MSA

Tube Size: 10 x 2.7m lengths = **27**m







## Floorwise supply the flooring professional with a versatile range of quality adhesives which won't let you down on the job!

Our range of products cover every need in order to achieve great results! We have the adhesive that holds fast and lasts the course. Floorwise won't let you down, and absolutely won't come unstuck when it comes to product quality, availability or supply!



#### **F500** Silicone Joint Sealant

This silicone joint sealant is specially formulated for use in providing a waterproof, hygienic, flexible seal, which is resistant to mildew and mould growth.

Coverage: approx. 11 linear metres of a 6mm bead per cartridge

- Interior and exterior applications
- High movement accommodation
- Excellent adhesion
- Lasts up to 25 years
- Contains fungicide





## adhesives

#### **F538** Water Resistant Wood Adhesive

This non-plasticised, cross linking PVA emulsion adhesive is specially formulated for wood bonding in all cases where a fast set, high bond strength and excellent water resistance are required. Suitable for virtually all woods, wood decoratives and high pressure laminates. Conforms to BSEN 204:1991:D3 and BS4071 for creep resistance.

Coverage: approx. 60–80 linear metres of 3mm bead per 500ml bottle

- Fast drying
- High initial grab
- High shear strength
- Great temperature resistance



- Fast set
- Easy application







Easy applica





An extremely versatile, high performance flexible, rapid curing MS polymer adhesive for bonding a wide variety of materials to most surfaces. Approved for direct stick stair nosings applications and compatible with most underfloor heating systems, this advanced polymer adhesive is easy and clean to apply.

Coverage: approx. 15 linear metres of a 5mm bead per cartridge

- Permanent elastic bond
- Rapid curing
- Excellent initial grab
- High performance bond
- Easy application
- Solvent free

- Low VOC
- Approved for direct stick stair nosing applications

**500**m

 Suitable for use with underfloor heating systems



Adhesives Screeds

Wise up on the Floorwise Adhesives
+Screeds range... ask for our brochure
at your nearest distributor!



## ELLOSE

## foil wrapped MDF

Floorwise has developed a quality range of scotia in wide variety of decors to ensure a professional finish to each and every installation.


#### F541 Scotia

Scotia Wood foiled Used to cover the expansion gap on wood and laminate floors

F541 Scotia Wood foiled

16.5mm x 16.5mm x 2.4m

Available in a wide range of decors, ask your local distributor for a set of colour samples.



# doding tools

#### Choosing the right tools for the job has never been easier!

Floorwise has brought together the **world's best tools** in one easy-to-follow **catalogue**.

Carefully selected for functionality, practicality and long-lasting quality, the tools have been chosen to provide the maximum assistance to the professional floor layer.

Just a selection of our extensive Flooring Tools range

With our national distribution network, serving customers on a local basis, expert help and advice is on hand. So, whether ordering by phone, online or a visit to your local trade counter, **you can put your trust in Floorwise**.

**Wise up** on the **Floorwise Tools** range... ask for our brochure at your nearest distributor!






# When it comes to flooring installation, **Floorwise** is the name for **quality** and **value**!

For **over 35 years** Floorwise has been the **number one choice** for flooring professionals.

Reliable service, through an exclusive network of distributors, and the consistent quality of our products has earned Floorwise an enviable reputation.

Floorwise strives to deliver excellence in innovation too, with a continuous development programme aimed at meeting the evolving needs of both consumers and installers alike.

#### for **sales** and **enquiries** contact:

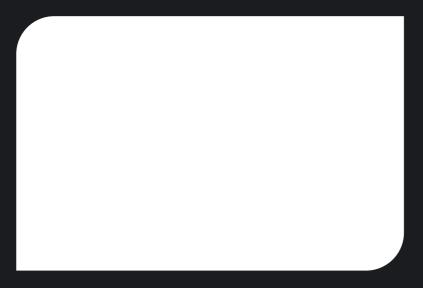

find us on f@floorwisehq or visit us at www.floorwise.co.uk

### it's time to get wise

about **flooring installation** with our other **market-leading** products:



